

Charakterystyka

Obudowa: Aluminium malowane proszkowo
Szkło hartowane 4mm
Uchwyt do montażu w zestawie

Material specifications


Housing: Die-casting powder coated aluminium
Step tempered glass 4mm
Mounting hang in set





SL-OW-LIB



SL-OW-LIB2

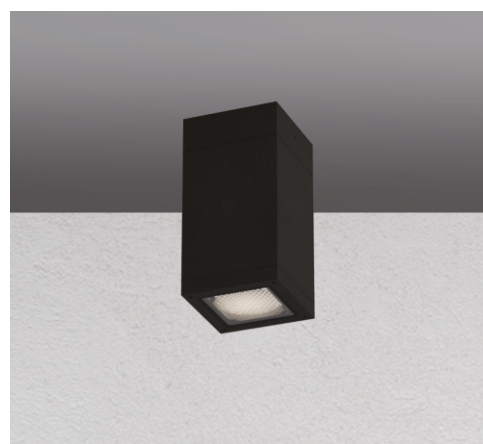

SL-OW-LIBC

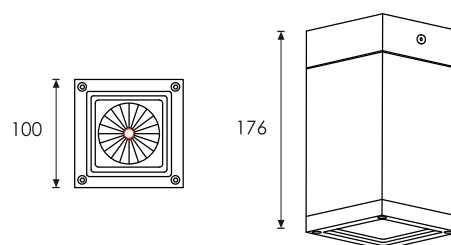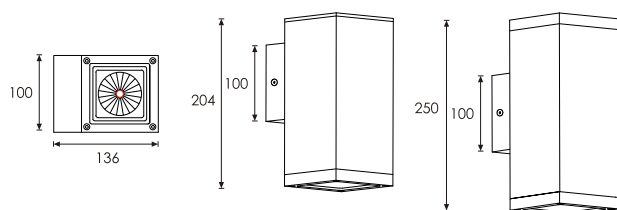

		
Painting Color:RAL9006 White aluminium color	Painting Color:RAL9005 Gray Brown Color	Painting Color:RAL8019 Jet Black color

Part no	LED	Colour	Soczewka/Beam	Napięcie/Voltage	Moc/Power	Lumen (typ)
SL-OW-LIB-WW	1x18W COB	3000K	15°,25°,38°	230V	20W	1705lm
SL-OW-LIB-CW	1x18W COB	5000K	15°,25°,38°	230V	20W	1776lm
SL-OW-LIB2-WW	2x18W COB	3000K	15°,25°,38°	230V	40W	2x1705lm
SL-OW-LIB2-CW	2x18W COB	3000K	15°,25°,38°	230V	40W	2x1776lm
SL-OW-LIBC-WW	1x18W COB	3000K	15°,25°,38°	230V	20W	1705lm
SL-OW-LIBC-CW	1x18W COB	5000K	15°,25°,38°	230V	20W	1776lm

