
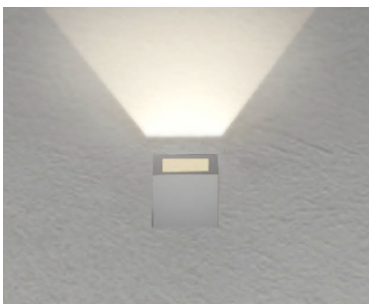


Charakterystyka


Obudowa: Aluminium malowane proszkowo
 Szkło hartowane 4mm
 Uchwyt do montażu w zestawie

Specification

Housing: Die-casting powder coated aluminium
 Step tempered glass 4mm
 Mounting hang in set]]


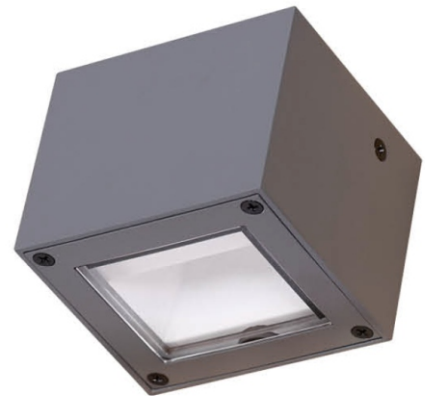


Up Light

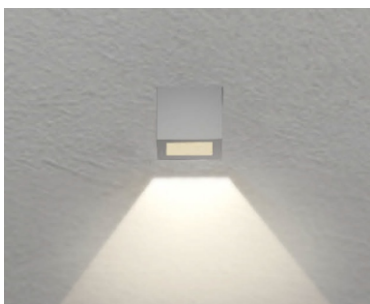

Down Light

Powder painting RAL 8019	Powder painting RAL 9005	Powder painting RAL 9006



Part no	LED	Colour	Soczewka/Beam	Napięcie/Voltage	Moc/Power	Lumen
SL-OW-ARA-WW	1x3W	3000K	WIDE	230V	5W	155lm
SL-OW-ARA-CW	1x3W	5000K	WIDE	230V	5W	155lm
SL-OW-ARAC-WW	1x6W	3000K	18°,25°,40°	230V	8W	651lm
SL-OW-ARAC-CW	1x6W	5000K	18°,25°,40°	230V	8W	745lm

