

Charakterystyka


Obudowa: Odlew aluminiowy
 Kabel zasilający: 2x1.0mm²L=0,5 m (24V)
 Kabel zasilający: 3x1.0mm²L=0,5 m (230V)
 Puszka montażowa ABS

Specification

Housing: coated aluminium
 Power cable: 2x1.0mm²L=0,5 m (24V)
 Power cable: 3x1.0mm²L=0,5 m (230V)
 Mounting sleeve ABS



Basic		Option	
Powder painting	Powder painting	Powder painting	Powder painting
RAL9006	RAL9003	RAL8019	RAL9005

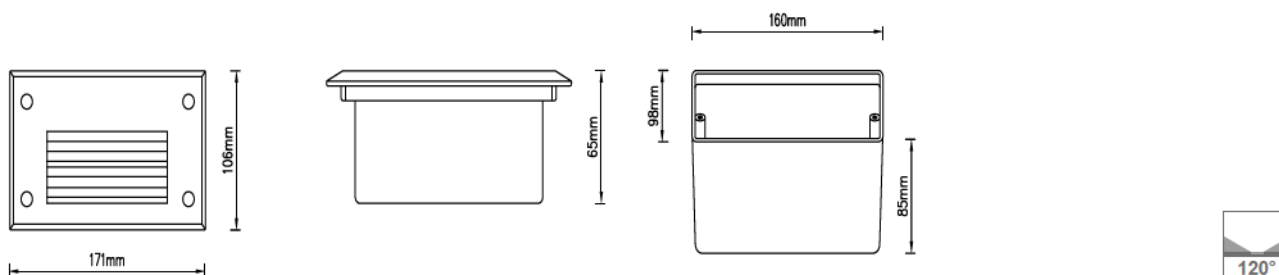

Part no	LED	Colour	Optics	Voltage	Power	Lumen
SL-IW-ML1-CW	24xSMD3020	6000K	120°	230V	3W	80lm
SL-IW-ML1-WW	24xSMD3020	3000K	120°	230V	3W	68lm

