


### Charakterystyka


Obudowa: Odlew aluminiowy  
 Szkło hartowane 4mm  
 Kabel zasilający: 3x1.0mm<sup>2</sup> L=2m (230V)

### Specification

Housing: coated aluminium  
 Step tempered glass 4mm  
 Power cable: 3x1.0mm<sup>2</sup> L=2m (230V)

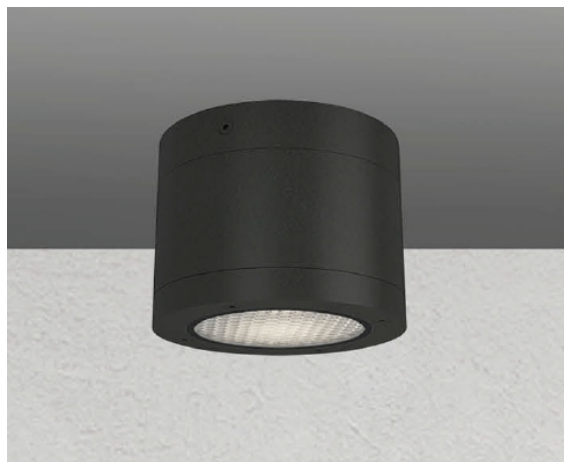

Powder painting RAL9005	Liquid painting color RAL9006	Powder painting PANTONE 432u
		

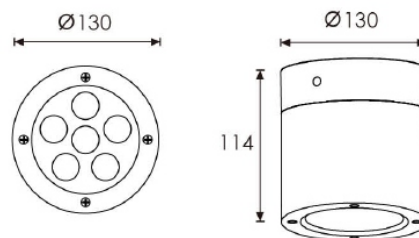

Part no	LED	Colour	Optics	Voltage	Power	Lumen
SL-DW-ROXA-WW	6x2W	3000K	9°,15°,20°,30°,45°	230V	12W	681lm
SL-DW-ROXA-NW	6x2W	4000K	9°,15°,20°,30°,45°	230V	12W	830lm
SL-DW-ROXA-CW	6x2W	6000K	9°,15°,20°,30°,45°	230V	12W	830lm

