

# ROXA COB


ARCHITECTURAL DOWNLIGHT




## Charakterystyka



Obudowa: Odlew aluminiowy  
Szkło hartowane 4mm  
Kabel zasilający: 3x1.0mm<sup>2</sup> L=2m (230V)

## Specification

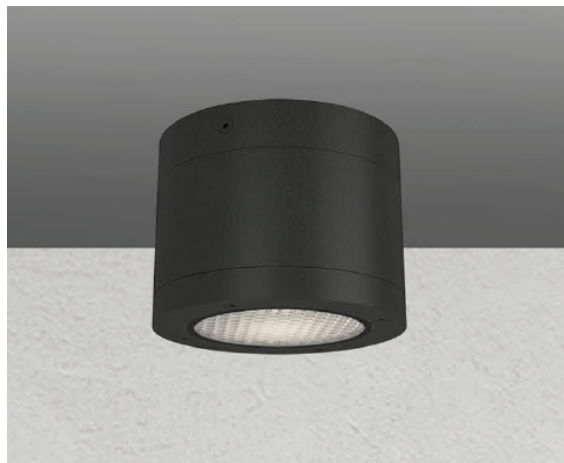Housing: coated aluminium  
Step tempered glass 4mm  
Power cable: 3x1.0mm<sup>2</sup> L=2m (230V)



Powder painting RAL9005	Liquid painting color RAL9006	Powder painting PANTONE 432u
		

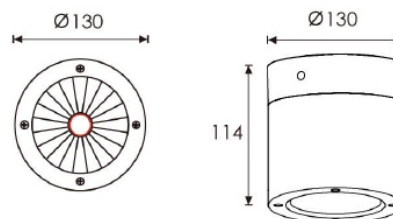

Part no	LED	Colour	Optics	Voltage	Power	Lumen
SL-DW-ROXAC-WW	1x8W	3000K	10°,35°	230V	11W	748lm
SL-DW-ROXAC-NW	1x8W	4000K	10°,35°	230V	11W	850lm
SL-DW-ROXAC-CW	1x8W	6000K	10°,35°	230V	11W	850lm

